

# Unity Cloud Services Data Centre Features

## Tier Two

- ✓ Site Availability of 99.75%.
- ✓ Less susceptible to disruption from both planned and unplanned activity.
- ✓ Multiple paths for power and cooling distribution. Includes redundant components (N+1).
- ✓ Includes raised floor, UPS and generator.
- ✓ Maintenance of power path and other parts of the infrastructure may sometimes require a processing shutdown.

## Data Centre Certification

- ✓ ISO27001:2017 Certified UKAS accredited.

## Power

- ✓ N+1 UPS System.
- ✓ Automatic backup generator.
- ✓ Generator runtime 7 days.
- ✓ Refuelling contracts with multiple providers.

## Cooling


- ✓ Redundant full room air conditioner capable of cooling a full load.

## Cabinets

- ✓ Secure, code-locked racks.

## Facility Security

- ✓ Code-locked external shutters.
- ✓ Reinforced steel access doors.
- ✓ Intruder alarm.
- ✓ CCTV covering data hall, all entrances and exits.
- ✓ Automatic alert and logging of entry and exit.
- ✓ Dual width reinforced external walks.

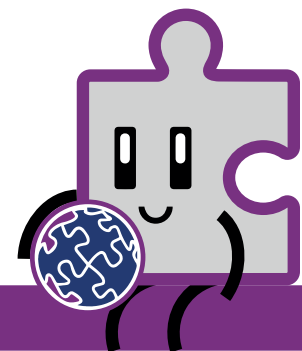

## Fire Suppression

- ✓ Argonite gas fire suppression system.
- ✓ Covers the entire data centre facility.